




Keeping the World Flowing
for Future Generations

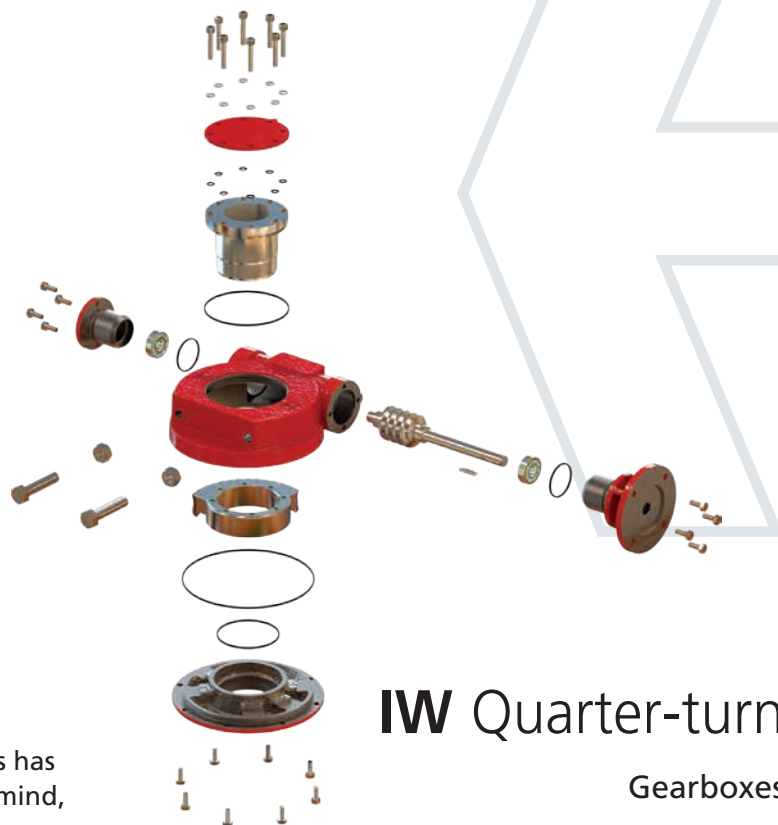

IW Quarter-turn Gear Series

The IW series of quadrant worm operators has been designed with customer stocking in mind, and features a removable steel output sleeve to facilitate bore and keyway machining. This separate output sleeve can be positioned through 90° steps on the IW3 & through 45° steps on the IW4 to IW11. The baseplate can be positioned through 45° steps on the IW3 to IW5 and through 22.5° steps on the IW6 to IW12. This facility allows for on or off centre mounting on the valve spool without special machining.

Operating temperature normally ranges from -40 to +250 °F, although other temperature ranges are available on request. Standard input (for actuation purposes) and output flanges are to MSS SP-101, however, equivalent standards such as ISO can be supplied.

Application

Rotork IW series operators are quarter-turn devices intended for the operation of ball, plug and butterfly valves as well as power and process dampers. The gearboxes are suitable for manual and motorised applications.

Features

- Totally enclosed gearing
- Grease filled for life and fully sealed
- Comprehensive gear ratios combined with a selection of auxiliary input spur gear reducers
- Angular contact bearings supporting worm shaft
- Removable output sleeve
- Repositionable baseplate facility
- Adjustable mechanical stops (at 0° and 90° ±5°)

IW Quarter-turn Gearboxes


Environmental Specification

- Enclosure: IP67 standard suitable for submerged duty up to a depth of 3 feet for 30 minutes
- Temperature: -40 to +250 °F

Options

- Ductile Iron
- IP68
- AWWA, ATEX, Nuclear
- All types of environment
- High temperature range -4 to +302 °F
- Extra high temperature range -4 to +392 °F
- Low temperature range -76 to +250 °F
- Padlockable handwheels
- Limit switches
- Lever arms
- Travelling nut for applications requiring less than 90° travel and more than 90°
- Modulating and multi-turn
- Input flanges for motorisation
- Flexible extensions
- Firesafe to ISO 10497
- Interlock safety system
- Enclosure IP68 suitable for submerged duty up to a depth of 50 feet for 72 hours
- CS type suitable for continuous submerged duty up to a maximum depth of 50 feet

IW Quarter-turn Gearboxes

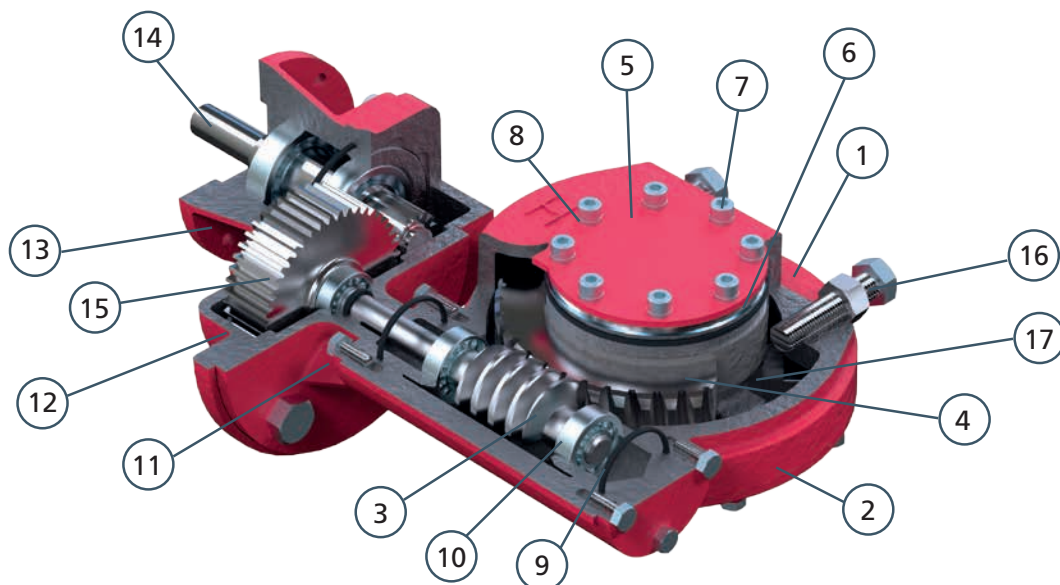


Material Specification for Rotork IW Series of Quarter-turn Valve Operators

No.	Description	Material	UK Standard	USA Standard	DIN Standard
1	Gearcase	SG Iron	BS1563 EN-GJS-450-10 BS1563 EN-GJS-400-15	ASTM A536 65-45-12	GGG40
2	Baseplate	Cast Iron or SG Iron	BS1561 EN-GJL-250 BS1563 EN-GJS-400-15	ASTM A48 35B/40B ASTM A536 65-45-12	GG25 GGG40
3	Worm Shaft	Steel	BS970 045M10 or 605M36T	AISI/SAE 1010 or 4340	C 10 or 42 MnMo 7
4	Quadrant	SG Iron	BS1563 EN-GJS-700-2	ASTM A536 100-70-03	GGG70
5	Position Indicator	Protected Steel	BS970 070M20	AISI/SAE 1023	C 22
6	Output Sleeve	Steel	BS970 070M20 or BS970 080M40 or BS970 070M55	AISI/SAE 1023 or AISI/SAE 1040 or AISI/SAE 1055	C 22 C 40 C 55
7	Drive Screws	Protected Carbon Steel	BS4168		
7a	Drive Screws O-ring	Nitrile Rubber			
8	Nordlock Washers	Protected Steel			
9	Seal	Nitrile Rubber			
10	Bearing	Angular Contact Ball Bearings			
11	Adaptor	Cast Iron	BS1561 EN-GJL-250	ASTM A48 35B/40B	GG25
12	Reducer Gearcase	Cast Iron	BS1561 EN-GJL-250	ASTM A48 35B/40B	GG25
13	Input Flange	Cast Iron or SG Iron	BS1561 EN-GJL-250 BS1563 EN-GJS-400-15	ASTM A48 35B/40B ASTM A536 60-40-18	GG25 GGG40
14	Input Shaft	Steel	BS970 605M36T	AISI/SAE 4340	42 MnMo 7
15	Spur Gear	Steel	BS970 817M40T	AISI/SAE 4340	40 NiCrMo 8 - 4
16	Fasteners	Protected Steel	BS3692		
17	Grease	Renolit CLX2			

Note: Because of the company's policy of continuous improvement, Rotork reserves the right to change specification details without prior notice.

IW Quarter-turn Gearboxes

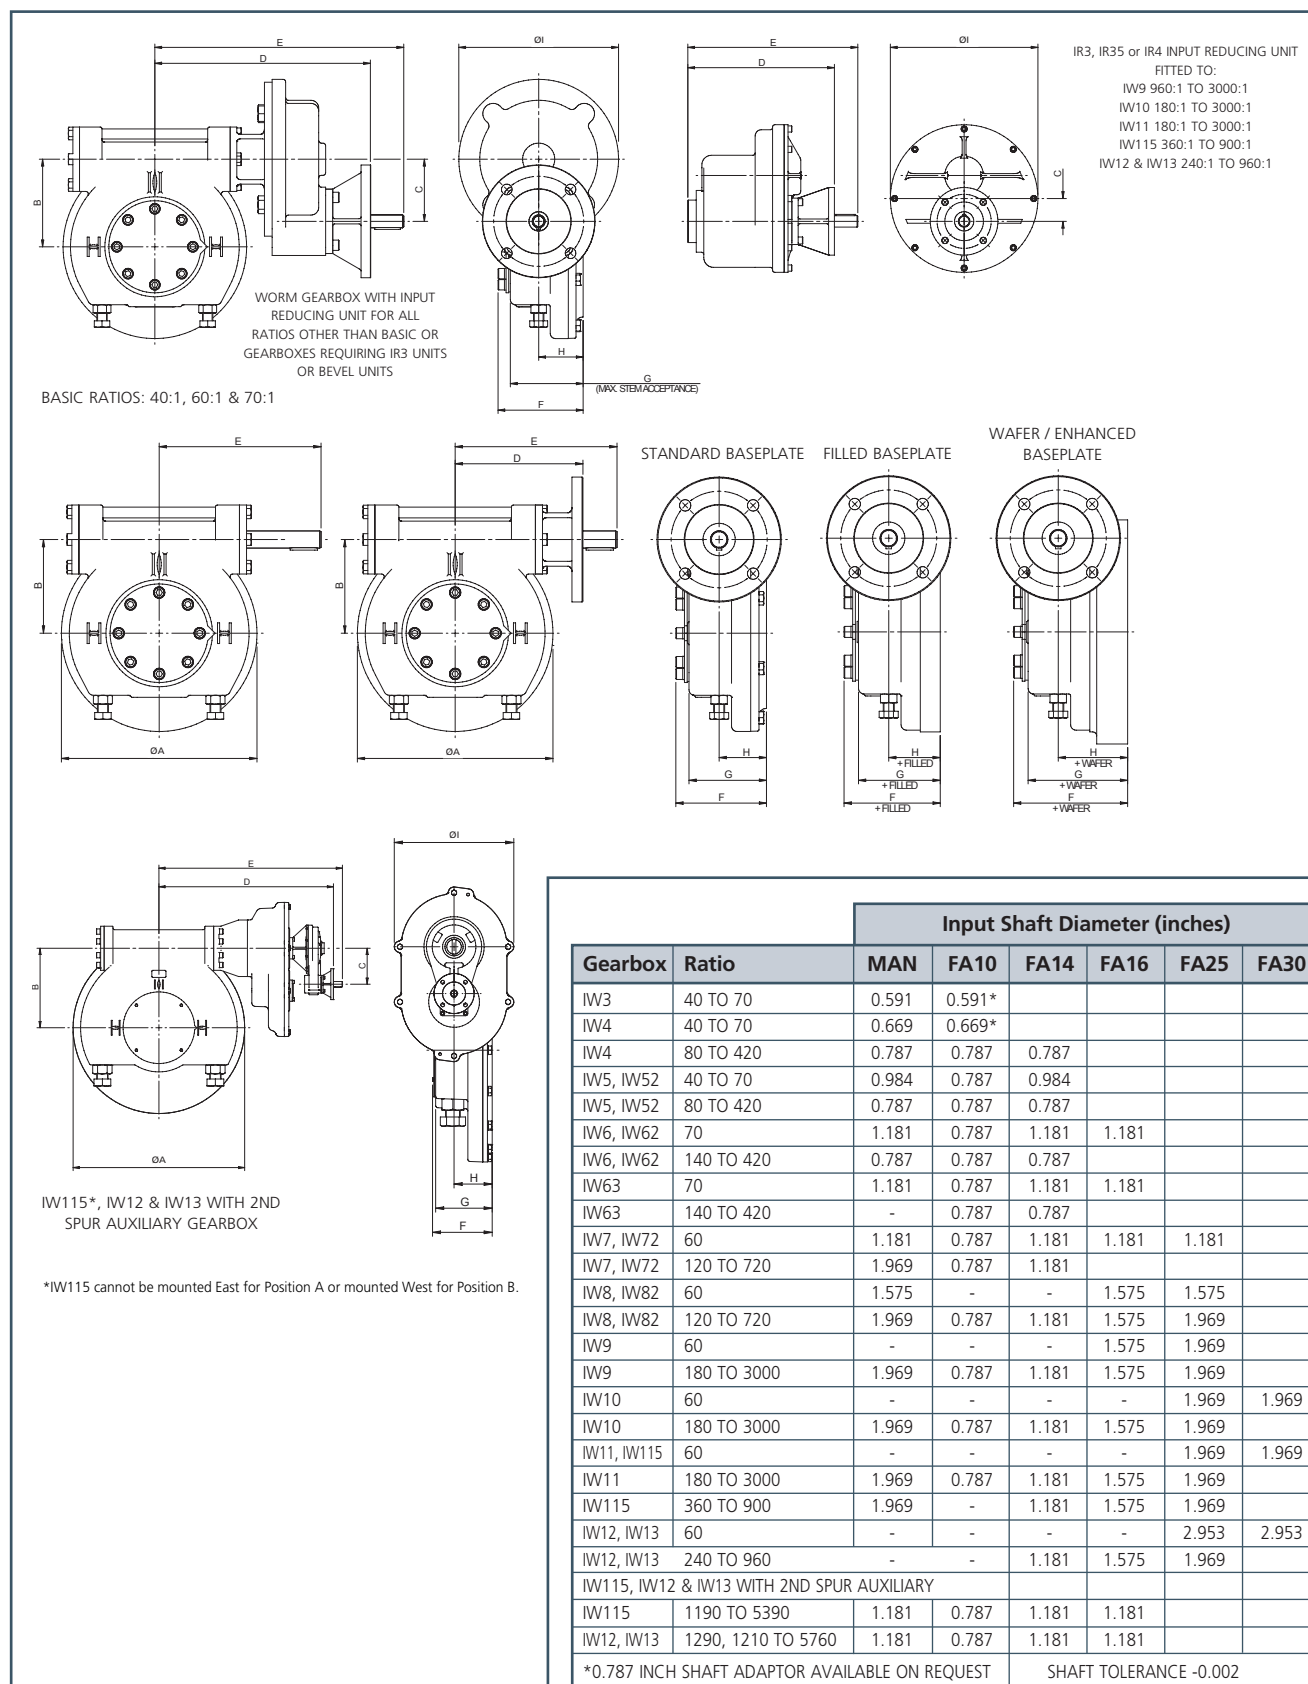

IW Quarter-turn Gearboxes

Dimensions and Weights

Gearbox	Ratio	ØA	B	C	D	E	F	G	H	ØI	Weight (lb)
IW3	40, 70	6.77	2.99		4.65	6.22	3.58	2.91	1.93		24
IW4	40, 70	8.58	4.02		5.59	7.17	4.02	3.35	1.97		49
IW4	80, 120, 140, 160, 210, 280	8.58	4.02	2.52	10.59	12.60	4.09	3.35	1.97	7.48	66
IW4	200, 240, 350, 420	8.58	4.02	3.78	11.46	13.46	4.09	3.35	1.97	9.76	77
IW5 / IW52	40, 70 / 40	11.22	5.35		7.32	9.29	5.20	4.49	2.72		99
IW5	80, 120, 140, 160, 210, 280	11.22	5.35	2.52	12.32	14.33	5.20	4.49	2.72	7.48	117
IW5	200, 240, 350, 420	11.22	5.35	3.78	13.19	15.20	5.20	4.49	2.72	9.76	128
IW52	80, 120, 160	11.22	5.35	2.52	12.32	14.33	5.20	4.49	2.72	7.48	117
IW52	200, 240	11.22	5.35	3.78	13.19	15.20	5.20	4.49	2.72	9.76	128
IW6, IW62, IW63	70	14.76	7.01		7.32	9.29	5.47	4.45	2.76		150
					7.72 for F10, FA10						
IW6, IW62, IW63	140 - 280	14.76	7.01	2.52	12.32	14.33	5.47	4.45	2.76	7.48	174
IW6, IW62, IW63	350 - 420	14.76	7.01	3.78	13.46	15.47	5.47	4.45	2.76	9.76	185
IW7, IW72	60	17.72	8.27		10.63	12.95	6.73	5.51	3.39		265
IW7, IW72	120 - 360	17.72	8.27	4.69	18.11	20.51	6.73	5.51	3.39	11.42	335
IW7, IW72	480 - 720	17.72	8.27	7.05	18.46	20.87	6.73	5.51	3.39	16.06	357
IW8, IW82	60	20.47	9.69		12.05	14.37	7.56	6.30	3.90		397
IW8, IW82	120 - 360	20.47	9.69	4.69	19.53	21.93	7.56	6.30	3.90	11.42	467
IW8, IW82	480 - 720	20.47	9.69	7.05	19.88	22.28	7.56	6.30	3.90	16.06	489
IW9	60	23.46	10.98		14.61	18.94	7.87	6.61	3.90		485
IW9	180 - 720	23.46	10.98	7.05	22.36	24.84	7.87	6.61	3.90	16.06	578
IW9	960 - 3000	23.46	10.98	2.32	23.82	26.22	7.87	6.61	3.90	15.04	639
IW10	60	28.94	13.50		15.63	19.96	8.50	7.09	4.33		728
IW10	180 - 3000	28.94	13.50	2.32	24.84	27.24	8.50	7.09	4.33	15.04	899
IW11 / IW11BB	60	31.30	15.00		16.30	20.63	9.72	7.87	4.72		1146
IW11 / IW11BB	180 - 3000	31.30	15.00	2.32	25.51	27.91	9.72	7.87	4.72	15.04	1257
IW115 / IW115BB	60	31.30	15.00		16.30	20.63	9.72	7.87	4.72		1146
IW115 / IW115BB	360 - 900	31.30	15.00	2.32	25.51	27.91	9.72	7.87	4.72	15.04	1190
IW115 WITH 2ND SPUR AUXILIARY	1190 - 5390	31.30	15.00	9.45	30.98	32.95	9.72	7.87	4.72	15.04	1257
IW12, IW13	60	38.27	17.72		18.11	24.02	10.24	9.88	6.54		2205
IW12, IW13	240 - 960	38.27	17.72	9.45	33.50	35.83	10.24	9.88	6.54	20.47	2535
IW12 WITH 2ND SPUR AUXILIARY	1290 - 5760	38.27	17.72	8.03	38.94	40.91	10.24	9.88	6.54	20.47	2579
IW13 WITH 2ND SPUR AUXILIARY	1210 - 5760	38.27	17.72	12.01	39.41	41.38	10.24	9.88	6.54	20.47	2601

All dimensions in inches.


Mounting Options

Gearbox	Max Bore ANSI B17.1 Key		Max Square Bore AF	MSS Flange Standard Baseplate	MSS Flange Filled Baseplate	MSS Flange Enhanced Baseplate	Filled Baseplate Thickness	Enhanced Baseplate Thickness
	Square	Rectangular						
IW3	1.75	1.75	1.375	FA10 - FA12	-	FA14 - FA16	-	0.87
IW4	2.25	2.5	2	FA10 - FA12- FA14	-	FA16	-	0.98
IW5, IW52	2.75	3	2.375	FA14 - FA16	FA25	FA25	0.24	1.26
IW6, IW62, IW63	3.75	3.875	3.25	FA16 - FA25	FA16 - FA25 - FA30	FA30	0	0.91
IW7, IW72	4.875	5.25	4.25	FA25 - FA30	FA30	FA35	0.39	1.22
IW8, IW82	5.625	6	4.75	FA25 - FA30 - FA35 - FA40	FA25 - FA30 - FA35	FA40 - FA48	0	1.50
IW9	6.5	6.5	5.125	FA30 - FA35 - FA40	FA30 - FA35 - FA40	FA40 - FA48	0	1.06
IW10	7.375	7.625	6	FA35 - FA40 - FA48	FA48	FA60	0	1.26
IW11, IW115	7.375	7.625	6	FA35 - FA40 - FA48	FA60	-	0	-
IW11BB, IW115BB	9.875	10.125	7.5	FA40 - FA48	FA60	-	0	-
IW12, IW13	9.5	10.25	7	FA35 - FA40 - FA48	-	-	-	-
IW12, IW13	11.75	12	9	FA48 - FA60	-	-	-	-

Customer Drive and Orientation Options


IW3 TO IW13 40:1 TO 70:1

INPUT SHAFT PROJECTION
WITHOUT INPUT REDUCER




DRIVE OPTIONS


KEYWAY POSITIONS WITH GEARBOX IN CLOSED POSITION




SQUARE BORE



SLOTTED BORE




INPUT SHAFT PROJECTION




IW4 TO IW9 UP TO 720:1

IW12 & IW13 RATIOS 240:1 TO 960:1


INPUT REDUCER ORIENTATION POS. A



INPUT REDUCER ORIENTATION POS. B




INPUT SHAFT PROJECTION




IW9 960:1 TO 3000:1

IW10 & IW11 180:1 TO 3000:1

IR3 INPUT REDUCER ORIENTATION POS. A




IR3 INPUT REDUCER ORIENTATION POS. B




IW115, IW12 & IW13 WITH 2ND SPUR AUXILIARY GEARBOX

2ND AUXILIARY GEARBOX ORIENTATION POS. A
WITH 1ST AUXILIARY SHOWN IN EAST
DEFAULT ORIENTATION EAST/EAST



2ND AUXILIARY GEARBOX ORIENTATION POS. B
WITH 1ST AUXILIARY SHOWN IN WEST
DEFAULT ORIENTATION WEST/WEST

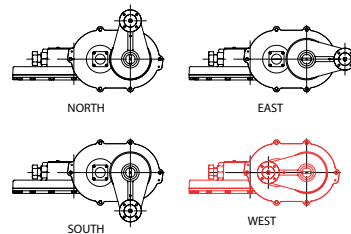


*IW115 1ST AUXILIARY SPUR CANNOT BE MOUNTED EAST FOR POSITION A OR MOUNTED WEST FOR POSITION B, DEFAULT ORIENTATION POS. B EAST/WEST.

A1 = Anticlockwise in, clockwise out.

A2 = Clockwise in, clockwise out.

B1 = Clockwise in, clockwise out.


B2 = Anticlockwise in, clockwise out.



Dimensions

Type	ØH	K	N
F200	8	2.97	3
F300	12	3.96	3
F400	16	3.96	4
F500	20	3.96	4
F600	24	3.96	4
F700	28	3.96	6
F800	32	3.96	6
F900	36	3.96	6
F1000	40	3.96	6
F1100	44	3.96	6
F1200	48	3.96	8

'F' Type handwheel

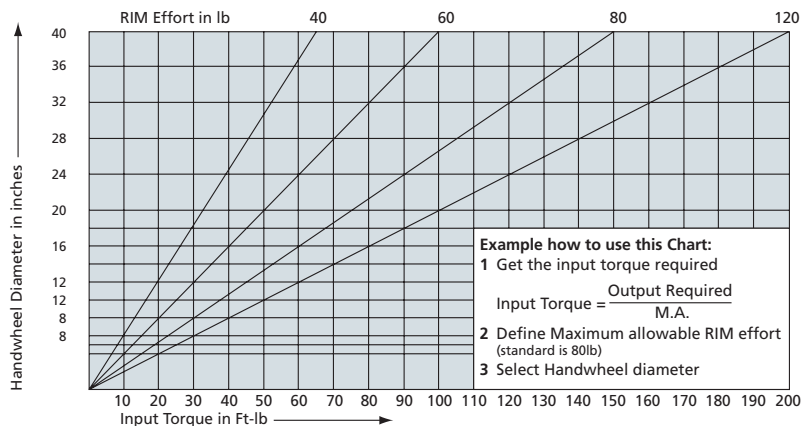

Gearbox Selection Chart

Gearbox	Ratio								Manual Output Torque (ft-lb)	Motorised Output Torque (ft-lb)	Maximum Motorised Input Torque (lb-ft)								Mechanical Advantage ±10%*								
IW3	70								782	600	26								23								
IW3	40								1202	800	53								15								
IW4	70								1955	1500	65								23								
IW4	140								2102	1615	37								44								
IW4	210	280	350	420					2176	1670	25	19	15	13					66	88	110	132					
IW4	40	80							2700	1800	120	62							15	29							
IW4	120	160	200						2899	1930	45	34	27						43	57	71						
IW4	240								3002	2000	23								86								
IW5	70								3253	2500	109								23								
IW5	140	210	280	350	420				3555	2730	62	41	31	25	21				44	66	88	110	132				
IW5	40								4499	3000	179								17								
IW5	80	120	160	200	240				4920	3280	103	68	50	40	34				32	48	65	81	97				
IW52	40								5384	3590	211								17								
IW52	80	120	160	200	240				5901	3934	123	82	61	49	41				32	48	65	81	97				
IW6	70								7804	6000	261								23								
IW6	140	210							8895	6840	155	104							44	66							
IW6	280	350	420						9588	7320	83	67	55						88	110	132						
IW62	70								9249	NA	NA								23								
IW62	140	210							10547	NA	NA								44	66							
IW62	280	350	420						11285	NA	NA								88	110	132						
IW63	70								NA	7118	309								23								
IW63	140	210	280	350	420				NA	8113	184	123	92	74	61				44	66	88	110	132				
IW7	60	120	180						13003	10000	400	208	141						25	48	71						
IW7	240	360	480	540	720				14751	11250	118	79	60	53	39				95	142	189	214	285				
IW72	60	120	180	240	360	480	540	720	19177	14751	590	307	208	155	104	78	69	52	25	48	71	95	142	189	214	285	
IW8	60								23403	18000	720								25								
IW8	120	180	240	360	480	540	720		25077	19200	400	270	202	135	102	90	67		48	71	95	142	189	214	285		
IW82	60								33191	25520	1021								25								
IW82	120	180	240	360	480	540	720		35477	27290	569	384	287	192	144	128	96		48	71	95	142	189	214	285		
IW9	60	180	240	360	480	540	720		46836	36000	1440	507	379	254	190	168	126		25	71	95	142	189	214	285		
IW9	960	1080	1440	2160	2520	3000			50081	38480	101	90	68	45	39	32			380	428	570	855	998	1188			
IW10	60	180	240	360	540	720			62399	48000	1920	676	505	338	224	168			25	71	95	142	214	285			
IW10	960	1080	1440	2160	2520	3000			62002	50000	132	117	88	58	50	42			380	428	570	855	998	1188			
IW11 / IW11BB	60	180	240	360	540	720			103998	80000	3200	1127	842	563	374	281			25	71	95	142	214	285			
IW11 / IW11BB	960	1080	1440	2160	2520	3000					211	187	140	94	80	67			380	428	570	855	998	1188			
IW115 / IW115BB	60	360	490	560	650	760					3835	710	524	457	361	339			25	135	183	210	242	283			
IW115 / IW115BB	900	1190	1370	1600	1910	2290			125387	95884	285	241	209	179	150	124			337	398	460	538	640	773			
IW115 / IW115BB	2650	3100	3680	4530	5390						108	92	77	63	52				893	1045	1243	1529	1820				
IW12	60	240	360	480	610	720					4042	1122	749	558	443	373			25	90	135	181	228	271			
IW12	960	1290	1530	1820	2040	2490			132763	101047	280	233	197	164	148	120			361	434	514	616	686	842			
IW12	2880	3640	3940	4320	5760						104	82	76	69	52				975	1233	1332	1462	1949				
IW13	60	240	360	480	610	720					6000	1664	1109	827	656	552			25	90	135	181	228	271			
IW13	960	1210	1440	1820	1920	2430			195000	150000	415	364	308	243	230	182			361	411	487	616	650	822			
IW13	2880	3640	3840	4860	5760						153	122	115	91	77				975	1233	1300	1644	1949				

For manual torque the static safety factor is 1.5. For motorised torque the static safety factor is 2. *The published M.A. is achieved after a few cycles.

A full listing of the Rotork sales and service network is available on our website.

www.rotork.com

Headquarters
Rotork Gears UK
tel +44 (0)113 2567922
email sales@rotorkgears.com

Corporate Headquarters
Rotork plc
tel +44 (0)1225 733200
fax +44 (0)1225 333467
email mail@rotork.com

rotork®

Electric Actuators and Control Systems
Fluid Power Actuators and Control Systems
Gearboxes and Gear Operators
Precision Control and Indication
Projects, Services and Retrofit